HD 9/50 GE CAGE

500 bar working pressure loosens stubborn dirt. The cage design offers all-round protection and allows safe crane loading. With hand truck principle for easy transport.



Made in Germany

4–6 h

FLAT FREE TIRES

E-Start

Order no.	1.367-506.0

- Gasoline engine with electro start
- Automatic speed reduction


Technical data		
EAN code		4039784731035
Working pressure	bar / MPa	150 – max. 500 / 15 – max. 50
Flow rate	l/h	500 – 900
Inlet temperature	°C	max. 60
Fuel		Petrol
Motor manufacturer		Honda
Motor type		GX 690
Motor rating	kW	16
Pump type		Maximum performance Kärcher crankshaft pump
Weight without accessories	kg	122
Weight (with accessories)	kg	150
Dimensions (L × W × H)	mm	930 × 800 × 920

This machine requires instruction.

Scope of supply
Spray gun: Industrial trigger gun
Stainless steel spray lance: 700 mm
Flat jet nozzle

Equipment
Electro start
High-pressure hose length: 10 m
High-pressure hose type: Heavy duty
Safety valve
Elapsed time counter



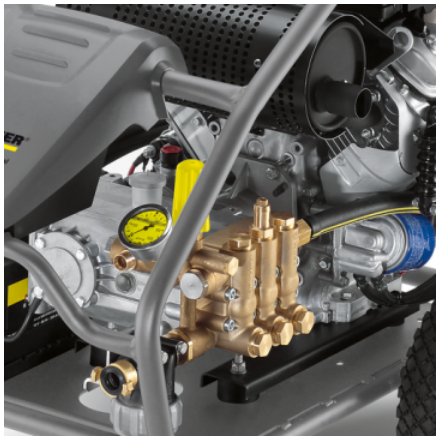

Speed regulation

- The motor speed is automatically reduced in stand-by mode.

Industrial spray gun

- The Kärcher industrial trigger gun was designed specially for heavy-duty use.

ACCESSORIES FOR HD 9/50 GE CAGE
1.367-506.0











		Order no.	Description	
ULTRA-HIGH-PRESSURE CLEANERS				
High-pressure hoses				
Pressure hose, 10 m, 640 bar, M22 × 1.5	1	6.391-848.0	650 bar, M 22 × 1.5	■
Pressure hose, 3 m, 640 bar, M22 × 1.5	2	6.391-856.0	650 bar, M 22 × 1.5.	☐
Pressure hose, 20 m, 640 bar, M22 × 1.5	3	6.391-857.0		☐
Pressure hose, 30 m, 640 bar, M22 × 1.5	4	6.391-020.0	Durable, abrasion-resistant and flexible multi-layer steel-reinforced hose with connection size M 22 × 1.5. Suitable for up to 640 bar working pressure.	☐
Pressure hose, 10 m, 620 bar, M22 × 1.5	5	6.391-846.0	650 bar, M 22 × 1.5	☐
Pressure hose, 20 m, 620 bar, M22 × 1.5	6	6.391-847.0	650 bar, M 22 × 1.5.	☐
Pressure hose, 30 m, 620 bar, M22 × 1.5	7	6.391-019.0	Durable, abrasion-resistant and flexible multi-layer steel-reinforced hose with connection size M 22 × 1.5. Suitable for up to 620 bar working pressure.	☐
Trigger guns				
Kärcher industry gun	8	4.775-824.0	650 bar – industrial spray gun with optimised flow. Robustness and durability for professional use. Food-safe and saltwater-resistant materials. Connector for HP hoses M 22 × 1.5.	■
Spray lances				
Spray lance	9	4.760-679.0	With nozzle holder.	■
	10	4.760-653.0		☐
Jet pipe complete 1550 mm 65 MPa	11	4.760-675.3		☐
Spray lance	12	4.760-677.0		☐
Spray lance extension	13	4.760-699.0	Spray lance extension 800 mm, 65 MPa.	☐
Attachment kits				
Attachment kit water shortage protection	14	2.641-923.0	For petrol engines.	☐

■ Included in the scope of supply. ☐ Available accessories.

KÄRCHER

ACCESSORIES FOR HD 9/50 GE CAGE
1.367-506.0


15


16


17


18


19


20


21


22–24


25


26


27


28

		Order no.	Description	
ULTRA-HIGH-PRESSURE CLEANERS				
Attachment kits				
ABS protection against water shortage	15	2.851-028.0	ABS steering rollers.	☐
Couplings and connectors				
Coupling	16	4.403-004.0	For joining and extending HD hoses. Connection 2 × M 22 × 1.5. Material: Stainless steel.	☐
Grease for stainless steel threaded joints	17	6.280-180.0	Grease for stainless steel screw connections.	☐
Pipe cleaning				
Foot valve for pipe cleaning	18	6.470-223.0	Foot valve for convenient and safe use of accessories for effective pipe cleaning.	☐
Pipe cleaning nozzle standard 030 50MPa	19	4.765-013.0	Standard pipe cleaning nozzle for pipe cleaning hoses with G1/4" threaded connection. Nozzle configuration: 3x backward.	☐
Pipe cleaning nozzle Four 030 50MPa	20	4.765-019.0	Quattro pipe cleaning nozzle (500/15) for pipe cleaning hoses with G1/4" threaded connection. The chisel point nozzle configuration is 3x backward and 1x forward.	☐
Pipe cleaning nozzle, Rotor	21	5.763-095.0	Rotor pipe cleaning nozzle for pipe cleaning hoses with G1/4" threaded connection. Nozzle configuration: 3x backward.	☐
Pipe cleaning hose	22	6.392-401.0	Flexible pressure hose (DN 8) for thorough pipe cleaning. 10 m long. Threaded connection for G1/4" nozzle.	☐
	23	6.392-402.0	Flexible pressure hose (DN 8) for thorough pipe cleaning. With threaded connection for G1/4" nozzle and 20 m long.	☐
	24	6.392-403.0	For through pipe cleaning: flexible, 30 m long pressure hose with threaded connection for G1/4" nozzle.	☐
Surface cleaner				
Surface Cleaner FRI 50 Me	25	2.643-577.0	Surface cleaner for efficient cleaning of surfaces up to 500 bar and hot water cleaning up to 100°C. 4 convenient steering rollers. Specific nozzle kits must be ordered separately.	☐
Nozzle package 015 FRI 50 Me	26	6.415-044.0	Nozzle kit specifically for FRI 50 Me Surface Cleaner. Nozzle size: 015.	☐
Abrasive blaster				
Adapter required for abrasive sprayer and TD 3000	27	5.401-325.0	M 20 × 1 IG to 9/16" UNF AG.	☐
Abrasive sprayer	28	9.872-250.0	Abrasive spray head for wet sand blasting. Nozzle size: 3 × 0.6. Only includes spray head. Without hose and lance.	☐

☐ Available accessories.

KÄRCHER

ACCESSORIES FOR HD 9/50 GE CAGE
1.367-506.0


29


30


31


32


33


34


37–38


39


40


41–43

		Order no.	Description	
ULTRA-HIGH-PRESSURE CLEANERS				
Abrasive blaster				
Replacement nozzle for abrasive blaster	29	6.025-346.0	Replacement nozzle for abrasive spray head made from boron carbide. Colour blue.	☐
F98 nozzle set, 0.60 mm	30	9.886-550.0		☐
Nozzle F98 for abrasive blaster	31	6.025-256.0	0.6 mm	☐
Suction lance	32	6.025-258.0	For the suction of spray agents.	☐
Abrasive material hose	33	6.025-308.0	Abrasive hose.	☐
Mounting tool for nozzle set	34	6.025-257.0	For F98 nozzles.	☐
Abrasive	35	6.025-309.0	25 kg, 0.5–1.00 mm, garnet sand.	☐
	36	6.025-310.0	25 kg, 0.7–1.40 mm, garnet sand.	☐
NOZZLES				
Power nozzles				
Flat jet nozzle, 15028	37	5.765-163.0	15° flat jet nozzle 15028 for high-pressure cleaner HD 9/50. Suitable for working pressures of up to 500 bar and 900 l/h (petrol, 60 Hz).	■
Point jet nozzle, 0028	38	5.765-160.0	Point jet nozzle 0028 for high-pressure cleaner HD 9/50. Suitable for working pressures of up to 500 bar and 900 l/h (petrol, 60 Hz).	☐
Screw nozzles F21				
Dummy nozzle F21	39	6.025-237.0	F21 screw-on dummy nozzle. Suitable for working pressures of up to 3,000 bar.	☐
Round jet nozzle F21, Saphir, 0,7 mm	40	6.025-222.0	Screw-on F21 sapphire round jet nozzle with a diameter of 0.70 mm. Suitable for working pressures of up to 3,000 bar.	☐
PROTECTIVE CLOTHING				
HD Overall size M	41	6.547-055.0	High-pressure protective suit for safe working with high-pressure water jets of up to 1000 bar. Particularly lightweight design which feels comfortable to wear and provides excellent freedom of movement.	☐
High-pressure protective suit, size L	42	6.547-056.0		☐

■ Included in the scope of supply. ☐ Available accessories.

ACCESSORIES FOR HD 9/50 GE CAGE
1.367-506.0


41–43


44


45


46


47


48


49

		Order no.	Description	
PROTECTIVE CLOTHING				
HD Overall size XL	43	6.547-057.0	High-pressure protective suit for safe working with high-pressure water jets of up to 1000 bar. Particularly lightweight design which feels comfortable to wear and provides excellent freedom of movement.	☐
ROTARY NOZZLES				
Single-jet rotary nozzles				
Tool for changing rotor seat	44	6.025-233.0	For F3, F4, F1, F25.	☐
Power Rotary Jet F8 030, 030, 1,05 mm	45	6.415-069.0	500 bar, 1.05 mm, 900 l/h, M 20 × 1, stainless steel.	☐
Repair set Power Rotary Jet F8 030, 030, 1,05 mm	46	6.812-000.0	Repair set for Power Rotary Jet. Suitable for up to 500 bar pressure and water volume of 900 litres/hour. Incl. rotor, fitting and O-ring.	☐
Power rotary jet repair kit F8	47	6.025-437.0	Repair kit for power rotary jet, order no. 6.415-915.0. Suitable for 500 bar pressure and 900 l/h water flow rate. Includes rotor, seat and O-ring (28 × 2).	☐
Multi-jet rotary nozzles				
Nozzle body	48	9.917-677.0	Rotary transmission lead-through with infinitely variable speed control. Includes protective pipe.	☐
Nozzle carrier head TD09	49	9.899-828.0	6-jet nozzle carrier head for F21 nozzle. Suitable for working pressures of up to 3,000 bar. 35° spray angle, includes guard and flow conditioner.	☐

☐ Available accessories.